


Important Information

Installing and Programming the GSMVLP GSM Module with 2-Way Voice with the Lynx Plus Series and ReadyGuard Plus Controls

Installation Notes

In order for the GSMVLP to properly communicate with the Central Station the Lynx Plus Series or ReadyGuard Plus Control must be properly installed and configured. After installing the GSMVLP in accordance with the GSM Module's Installation and Programming Guide, ensure that the wiring is routed in accordance with Figure 1.

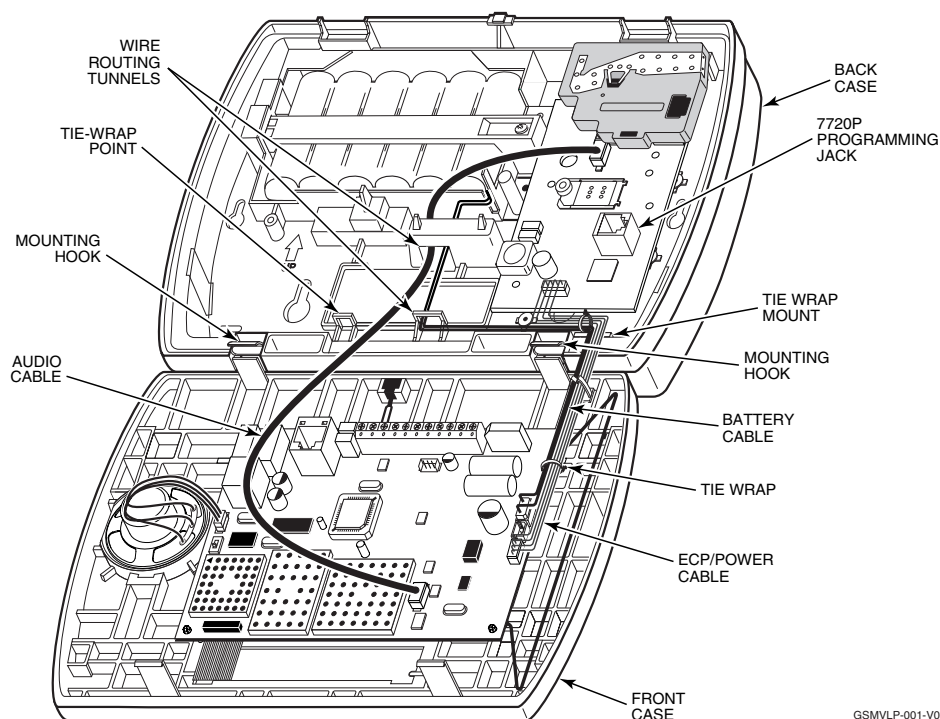

Programming Notes

When programming the Lynx Plus Series and ReadyGuard Plus Controls to communicate with the GSMVLP GSM Module. Fields 55, 77 and 91 must be programmed as follows:

Radio reporting only:

Field Selection

55	3
77	1, 2
91	0 or 2 (2 is default but remote phone control will not work if GSM reporting only is selected.)

Radio reporting with two-way voice via GSMVP:

Field Selection

55	5
77	2, 2
91	4

Once radio programming is complete enter Installer Code and Off on the control to send the registration for the GSMVLP to AlarmNet.

Honeywell

2 Corporate Center Drive, Suite 100
P.O. Box 9040, Melville, NY 11747
Copyright © 2009 Honeywell International Inc.

www.honeywell.com/security



800-05661 12/09 Rev. A